

### PARTS ENCLOSED

(A) Junction Box (Not included) 22.7kg/50lbs. MIN. FIXTURE RATED

(B) Pull Blasting Screw (Not included. 6 Set)

(C1) Ceiling Plate (1)

(C2) Canopy (1)

(C3) Screw Cap (10)

(D) Body B (1)

(E) Wire Nut (3)

(F) Bulb+Spare (18+6)

(G1) Glass Drop Spare ( 2.6X15.7H inches) (3)

(G2) Glass Drop Spare (2.6X9.8H inches) (2)

(1) Glass Drop ( 2.6X9.8H inches) (28)

(2) Glass Drop (2.6X9.8H+ 2.6X15.7H inches) (36)

(3) Glass Drop (2.6X15.7H inches) (44)

### PRODUCT DESCRIPTION:



General material: Glass & Iron

Height: 160.0cm (63.00in)

Width: 41.6cm (16.38in)

Length: 123.2cm (48.50in)

Weight: 135.95kg (299.71lbs)

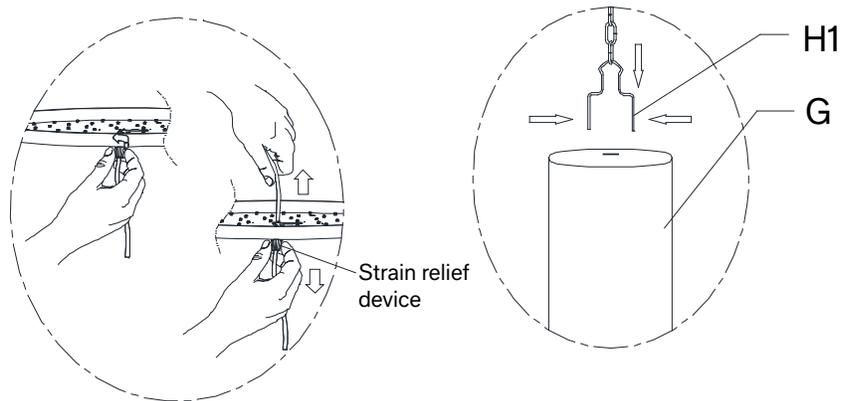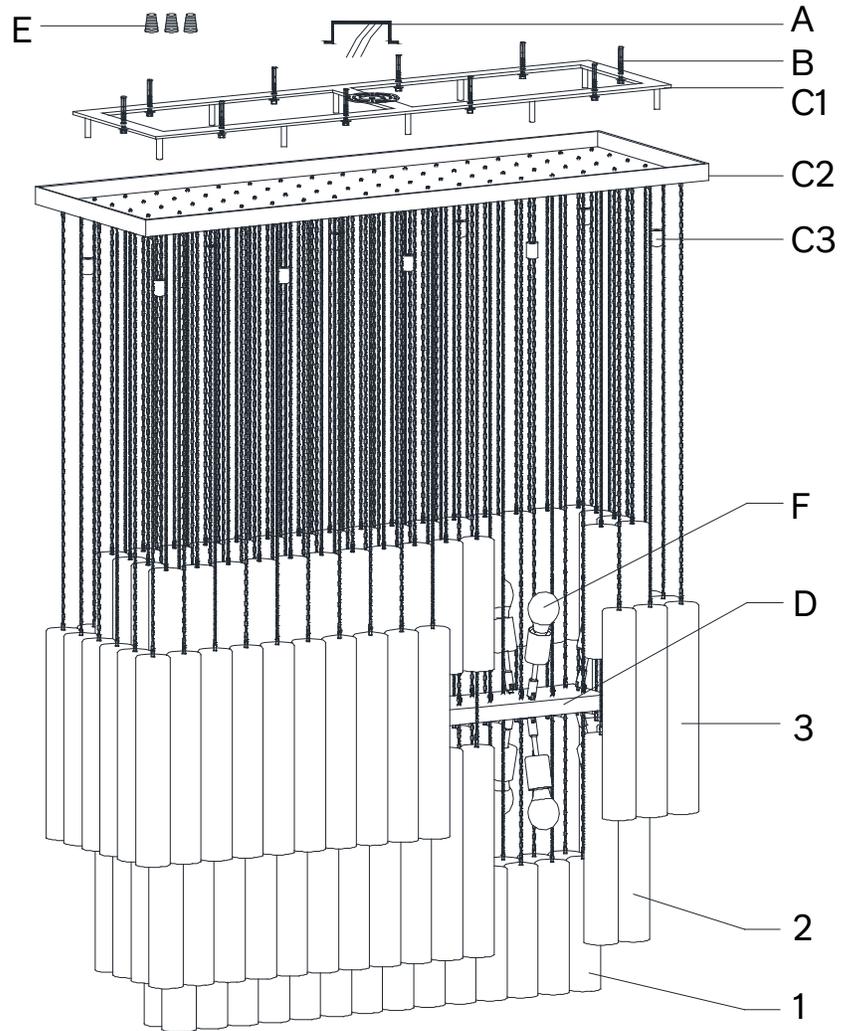

**IMPORTANT PLEASE READ****WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****SAFETY INSTRUCTIONS:**

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 18 x 5-watt maximum E26 LED standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light, at least a ceiling capacity of 679.75kg (1498.56lbs) is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children.

**WARNINGS:**

1. Turn off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electricity shock, or personal injury when replacing light bulb, do not touch bulb when fixture is turned on. Always turn off the ceiling light and allow it to cool prior to changing bulb. Never look directly at a lite bulb. Keep flammable materials away from lite bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**

 **WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

**ASSEMBLY & INSTALLATION:**

1. Carefully remove all parts from the box and remove all plastic covering.
  2. Turn OFF power to the junction box where the ceiling light will be installed.
  3. Loosen the screw cap (C3) from canopy (C2) and remove the ceiling plate (C1) from canopy (C2).
  4. Drill ten holes in the ceiling corresponding with ceiling plate (C1), then knock expanded metal into the hole. Attach the ceiling plate (C1) to the ceiling with pull blasting screws (B). Note: Depending on your ceiling, fix ceiling plate with pull blasting screw.
  5. Loosen the strain relief device and thread the main cable into it and canopy.
  6. Connect the ground wire from the fixture to the ground junction box wire (A) (usually the green or bare wire) with a wire nut (E) and wrap the connection with electrical tape. Connect the hot wire to the hot junction box wire (A) (usually black or smooth) with a plastic wire nut (E) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A) (usually white or ribbed) with a plastic wire nut (E) and wrap the connection with electrical tape.
  7. Move the ceiling box (C2) up to the ceiling, then fasten the screw caps (C3).
  8. Hang the body B (D) to the canopy (C2) by chain.
  9. Fasten light bulbs (F) to the lamp holders.
  10. Hang the glass drop (1)-(2)-(3) from inner layer to outer layer per drawing as left. For layer 1, hang the glass drop (1) onto the bottom of body B (D). Hang the glass drops (2)-(3) onto the canopy (C2) from inner layer to outer layer.
- To ensure safety of chandelier during glass installation, please maintain level of chandelier by ensuring you install glass drops in balanced way on opposite ends of light.
11. Restore power to the junction box and test ceiling light fixture.

**CARE INSTRUCTIONS:**

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable / cord of this ceiling light cannot be replaced; if the cable is damaged, do not use the light.

**ENVIRONMENT:**

Special waste handling may be required. Please contact your local authorities for more information.