

# RESTORATION HARDWARE

## CABOT 49" ROUND PENDANT

### PARTS ENCLOSED

- (A) Wire nut (3)
- (B) Cross bar (1)
- (C) Screw (2)
- (D) Ceiling loop (1)
- (E) Canopy (1)
- (F) Lock collar (1)
- (G) Chain (1)
- (H) Link (1)
- (I) Top loop
- (J) Hook (4)
- (K) Hanging tube (4)
- (L) Frame hook (4)

### IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to six (12) 60-watt maximum E12 Type CA candelabra bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.


### WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. Do not connect electricity until your lamp is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.
6. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

**IMPORTANT: For a safe and secure installation, please ensure that the electrical box to which this fixture will be mounted is properly attached to a structural member of the building.**

### TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Carefully remove all parts from the box and remove all plastic covering.
3. Install the cross bar (B) with ceiling loop (D) to outlet box by using mounting screws (C) provided.
4. Put canopy (E) to ceiling loop, and secure with lock collar (F).
5. Using the dimensions of the fixture as a guide, shorten the chain (G) as needed using a pair of chain pliers.
6. Take into consideration that you will use the chain end link to mount the chandelier once you have removed the excess chain.
7. Unscrew the threaded collar on the chain end link. Attach the chain to the ceiling loop (D). Close the threaded collar to secure the chain.
8. Hook side hanging tube (K) to loop (J) and loop (L).
9. Unscrew the threaded collar on the other chain end link. Raise the fixture and attach chain end link to the top ring (I). Close the threaded collar to secure the fixture body.
10. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (G).
11. When you reach the canopy and ceiling loop, measure the wires and cut. Be certain to leave enough to connect inside the canopy.
12. Strip the insulation back on the two power supply wires about 5/8".
13. Twist the power supply and ground wires together and push through the center hole in the ceiling loop.
14. Attach the fixture ground wire and house ground wire (usually green or bare wire) to ceiling outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. **IT IS IMPERATIVE THAT THIS FIXTURE BE PROPERLY GROUNDED.**
15. Attach the common wire (ribbed, no words) from the fixture to the white wire from the building using the provided wire nut (A).
16. Attach the hot wire (smooth, with words) from the fixture to the black wire from the building with the provided wire nut (A). **DO NOT REVERSE THE HOT AND COMMON CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
17. Neatly tuck the connections into the outlet box.
18. Thread the canopy (E) to lock collar (F).
19. Insert the recommended bulbs (not included) into the threaded sockets.
20. Restore power and enjoy your new chandelier.

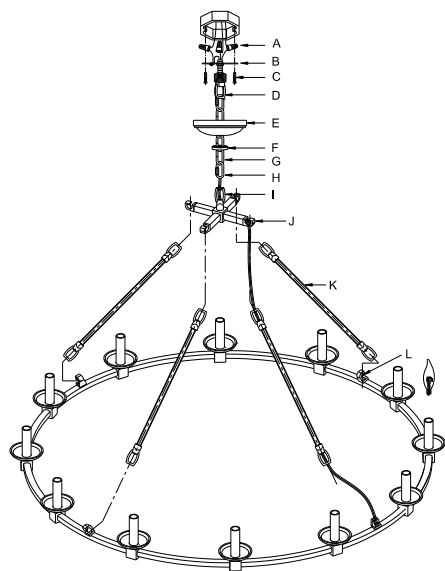

### CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.