



# RH






## BOULE DE CRISTAL ROUND CHANDELIER 24"

### PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Nipple (1)
- (C) Canopy (1)
- (D) Mounting Loop (1)
- (E) Canopy Ring (1)
- (F) Hanging Loop (1)
- (G) 6" Connection Rods (2)
- (H) 12" Connection Rods (2)
- (I) Fixture Body (1)
- (J) 18" Connection Rods (2)
- (K) Connective Rods (5)
- (L) Sockets (12)
- (M) Shades (12)
- (N) Bulbs (12)
- (O) Set Screw (1)
- (P) Allen Wrench (1)



Install safety cable:  
 1. Wrap the safety cable into the slot hole on the mounting plate.  
 2. Wrap the safety cable around the saddle (a).  
 3. Insert U-bolt clip (b) into the saddle (a) and secure with the nuts (c).

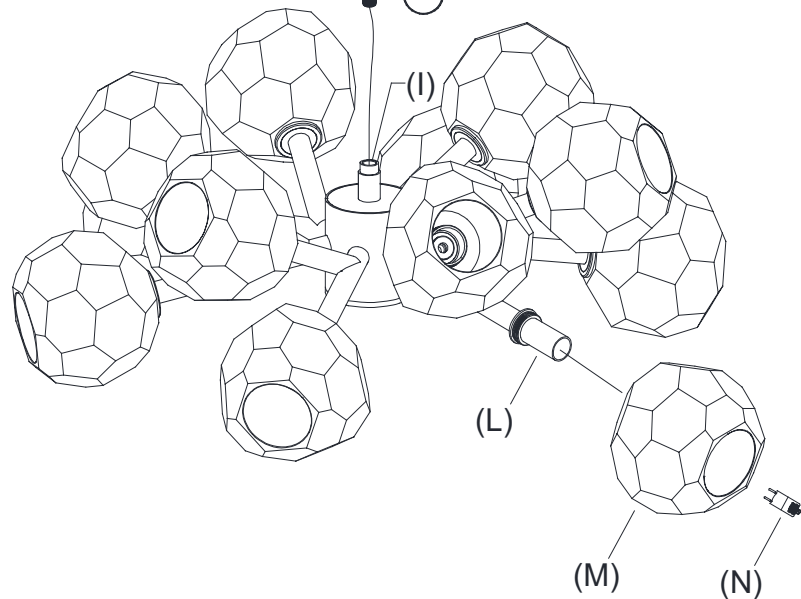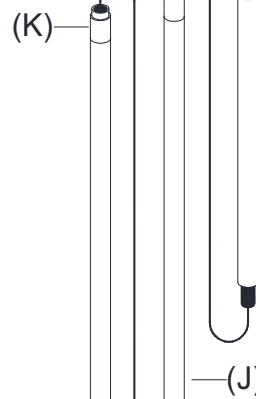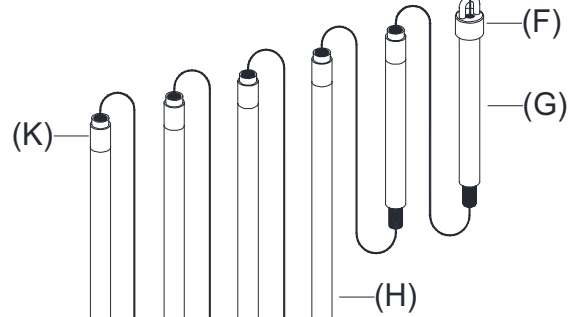

## IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to twelve (12) 20-watt Type T4 lightbulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

## ASSEMBLY &amp; INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic coverings.
- Determine the hanging length of the fixture. Connect Fixture Body (I) to some or all Connection Rods (G) (H) (J) and Connective Tubes (K) according to the height needed.
- Thread Hanging Loop (F) onto the inner threaded rod of the top of Connection Rods (G) (H) (J).
- Hook Hanging Loop (F) to the closable link on Mounting Loop (D).

## ASSEMBLY &amp; INSTALLATION CONT.

- Unscrew Canopy Ring (E). Slide Canopy Ring (E) and Canopy (C) on to closable link on Mounting Loop (D).
- Affix Mounting Strap (A) to the ceiling and secure with mounting screws (not included) and proper fasteners from your local hardware store.
- Insert Nipple (B) into the center hole of Mounting Strap (A).
- Insert Nipple (B) into Mounting Loop (D). Note: You can use Allen Wrench (P) to tighten Set Screw (O) when Set Screw is loosened.
- Feed the wires through Connection Rods (G) (H) (J), Hanging Loop (F), Mounting Loop (D), and Canopy (C).
- Connect the safety steel wire from Fixture Body (I) and the safety cable from the ceiling. Refer to the illustration on previous page.
- Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the neutral wire. The second wire's covering is smooth – this is the hot wire. The bare wire is the ground wire.
- Connect the ground wire from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the ground wire from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- Connect the neutral wire from your fixture with the neutral wire (usually white) from your ceiling box using a wire nut.
- Connect the hot wire from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- Attach Canopy (C) to the affixed Mounting Strap (A) and secure with Canopy Ring (E).
- Thread Shades (M) onto each of Sockets (L).
- Insert Bulbs (N) into each of Sockets (L).
- Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.