

RH

VARESE TWO-TONED ROUND MIRROR 26" (66 CM)

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ENGLISH

VARESE TWO-TONED ROUND MIRROR 26" (66 CM)**PART LIST**

- (A) Mirror With Bracket (1)
- (B) Screw - M4 x 30mm (4)
- (C) EZ Mini Anchor 14 x 44mm (4)
- (D) Aluminum Hanger (1)

WARNING

1. In order to prevent falling down this product must be used with the wall attachment device provided.
2. Assess the suitability of the wall to ensure that the fastening devices will withstand the forces generated.

STORAGE

1. Do not stack anything on top of the mirror.
2. Keep the mirror packaged until installation.
3. Store mirror upright on the long edge.

MIRROR HANDLING INSTRUCTIONS

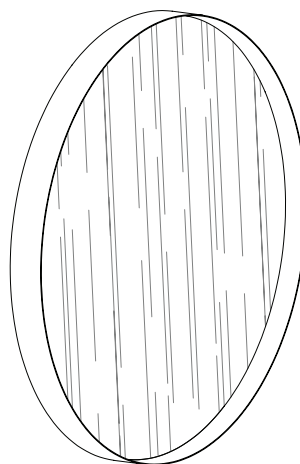
Caution:

1. Remove vertically from package.
2. Always carry mirror vertically as illustrated.
Carrying flat will cause breakage.


BEFORE YOU BEGIN

1. Professional installation recommended.
2. Tool and materials required:
 - Carpenter's level
 - Phillips head screwdriver
3. These instructions are provided for your safety. It is important that they are read carefully and completely before installation of the fixture.
4. For your safety, it is recommended that two people hang the fixture.
5. Check with a professional to ensure your wall can tolerate a fixture weighing 36 lbs (16 kg).
6. When wall mounting, stud mounting is strongly recommended.


(A)





(B)



(C)






(D)

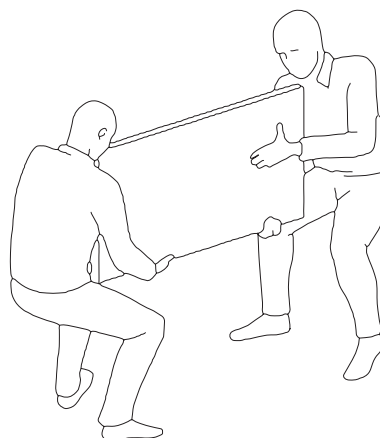



INSTALLATION OF MIRROR

1. Unpack all parts and place them on a protected work surface.
2. Determine the exact location of the fixture and mark the holes on the wall surface using the holes in the aluminum hanger (D) as a guide.
3. Drill small holes on each point location on the wall.
Each hole should be just large enough to accommodate EZ mini anchor (C).
4. Insert the EZ mini anchors (C) into the holes on the wall.
5. Mount the aluminum hanger (D) into the wall using screws (B).
6. Check that the aluminum hanger fixture is securely screwed into the wall.
7. Place the mirror with hanger cleat (A) into the aluminum hanger fixture.
8. Installation is complete.

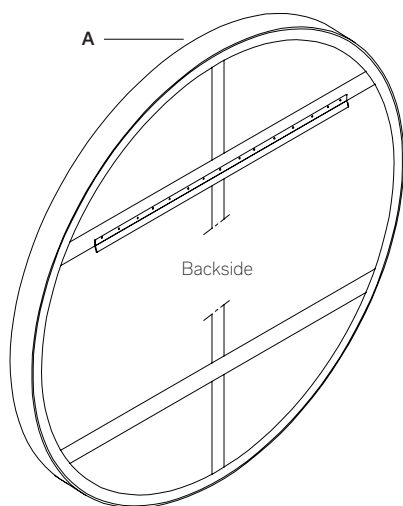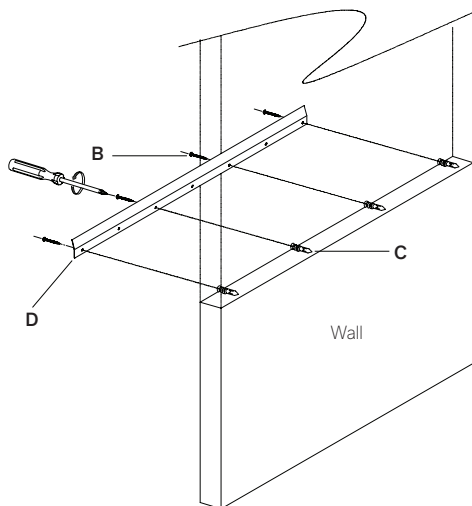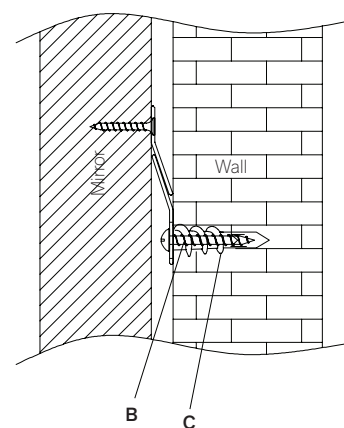FIGURE 1**FIGURE 2****FIGURE 3**

****NOTE: MAKE SURE THAT THE TWO (2) CLEATS (1 ON MIRROR AND 1 ON WALL) ARE LOCKED AND SECURED WITH EACH OTHER. A LEVEL CHECK IS HIGHLY RECOMMENDED. CHECK AND ADJUST IF NEEDED.**

FIGURE 4**FIGURE 5****CLEANING INSTRUCTIONS**

To clean, use a soft dry or damp cloth.

Do not use abrasive cleaners.



VARESE TWO-TONED ROUND MIRROR 42" (107 CM)

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ENGLISH

VARESE TWO-TONED ROUND MIRROR 42" (107 CM)**PART LIST**

- (A) Mirror With Bracket (1)
- (B) Screw - M4 x 30mm (8)
- (C) EZ Mini Anchor 14 x 44mm (8)
- (D) Aluminum Hanger (1)

WARNING

1. In order to prevent falling down this product must be used with the wall attachment device provided.
2. Assess the suitability of the wall to ensure that the fastening devices will withstand the forces generated.

STORAGE

1. Do not stack anything on top of the mirror.
2. Keep the mirror packaged until installation.
3. Store mirror upright on the long edge.

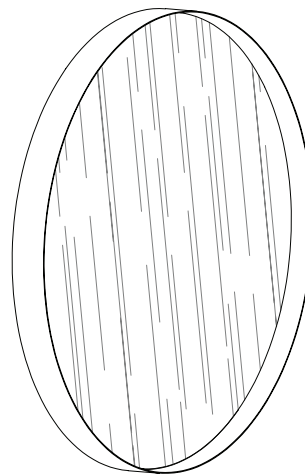


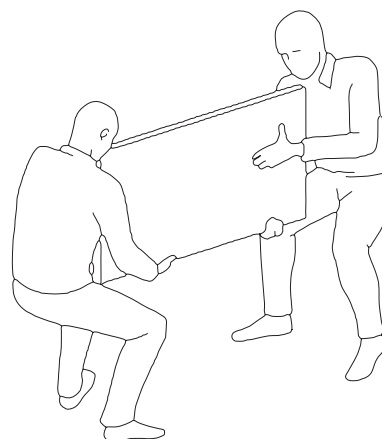

MIRROR HANDLING INSTRUCTIONS

Caution:

1. Remove vertically from package.
2. Always carry mirror vertically as illustrated.
Carrying flat will cause breakage.




BEFORE YOU BEGIN

1. Professional installation recommended.
2. Tool and materials required:
 - Carpenter's level
 - Phillips head screwdriver
3. These instructions are provided for your safety. It is important that they are read carefully and completely before installation of the fixture.
4. For your safety, it is recommended that two people hang the fixture.
5. Check with a professional to ensure your wall can tolerate a fixture weighing 88 lbs (39 kg).
6. When wall mounting, stud mounting is strongly recommended.



(A)**(B)****(C)****(D)**

INSTALLATION OF MIRROR

1. Unpack all parts and place them on a protected work surface.
2. Determine the exact location of the fixture and mark the holes on the wall surface using the holes in the aluminum hanger (D) as a guide.
3. Drill small holes on each point location on the wall.
Each hole should be just large enough to accommodate EZ mini anchor (C).
4. Insert the EZ mini anchors (C) into the holes on the wall.
5. Mount the aluminum hanger (D) into the wall using screws (B).
6. Check that the aluminum hanger fixture is securely screwed into the wall.
7. Place the mirror with hanger cleat (A) into the aluminum hanger fixture.
8. Installation is complete.

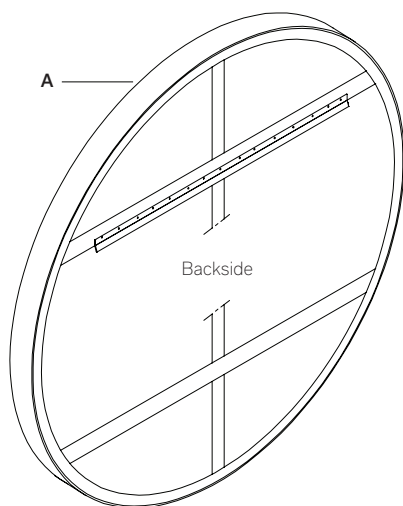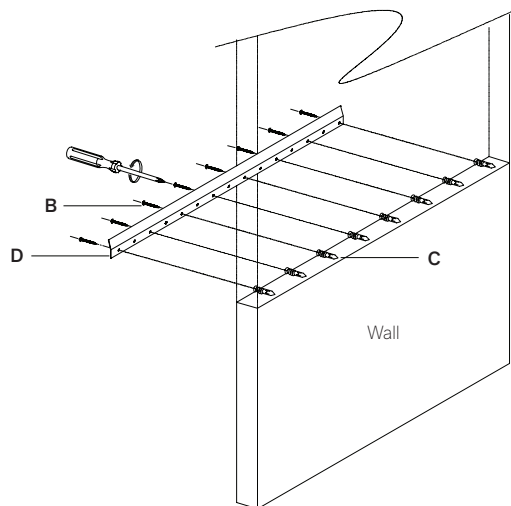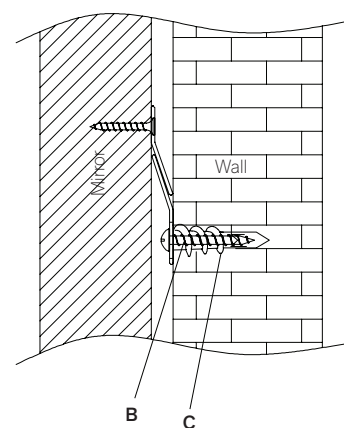FIGURE 1**FIGURE 2****FIGURE 3**

****NOTE: MAKE SURE THAT THE TWO (2) CLEATS (1 ON MIRROR AND 1 ON WALL) ARE LOCKED AND SECURED WITH EACH OTHER. A LEVEL CHECK IS HIGHLY RECOMMENDED. CHECK AND ADJUST IF NEEDED.**

FIGURE 4**FIGURE 5****CLEANING INSTRUCTIONS**

To clean, use a soft dry or damp cloth.
Do not use abrasive cleaners.



VARESE TWO-TONED ROUND MIRROR 60" (153 CM)

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ENGLISH

VARESE TWO-TONED ROUND MIRROR 60" (153 CM)**PART LIST**

- (A) Mirror With Bracket (1)
- (B) Screw - M4 x 30mm (8)
- (C) EZ Mini Anchor 14 x 44mm (8)
- (D) Aluminum Hanger (1)

WARNING

1. In order to prevent falling down this product must be used with the wall attachment device provided.
2. Assess the suitability of the wall to ensure that the fastening devices will withstand the forces generated.

STORAGE

1. Do not stack anything on top of the mirror.
2. Keep the mirror packaged until installation.
3. Store mirror upright on the long edge.

MIRROR HANDLING INSTRUCTIONS

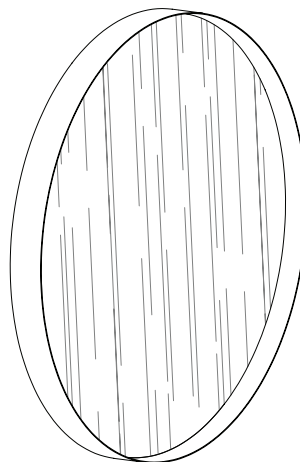
Caution:

1. Remove vertically from package.
2. Always carry mirror vertically as illustrated.
Carrying flat will cause breakage.


BEFORE YOU BEGIN

1. Professional installation recommended.
2. Tool and materials required:
 - Carpenter's level
 - Phillips head screwdriver
3. These instructions are provided for your safety. It is important that they are read carefully and completely before installation of the fixture.
4. For your safety, it is recommended that two people hang the fixture.
5. Check with a professional to ensure your wall can tolerate a fixture weighing 121 lbs (54 kg).
6. When wall mounting, stud mounting is strongly recommended.


(A)





(B)



(C)






(D)

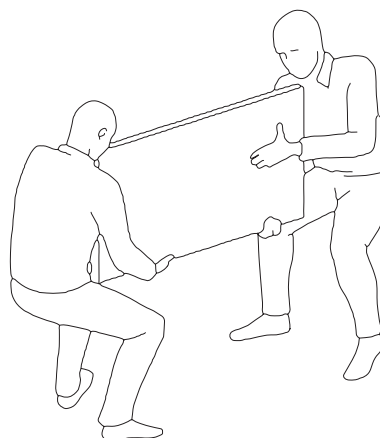



INSTALLATION OF MIRROR

1. Unpack all parts and place them on a protected work surface.
2. Determine the exact location of the fixture and mark the holes on the wall surface using the holes in the aluminum hanger (D) as a guide.
3. Drill small holes on each point location on the wall.
Each hole should be just large enough to accommodate EZ mini anchor (C).
4. Insert the EZ mini anchors (C) into the holes on the wall.
5. Mount the aluminum hanger (D) into the wall using screws (B).
6. Check that the aluminum hanger fixture is securely screwed into the wall.
7. Place the mirror with hanger cleat (A) into the aluminum hanger fixture.
8. Installation is complete.

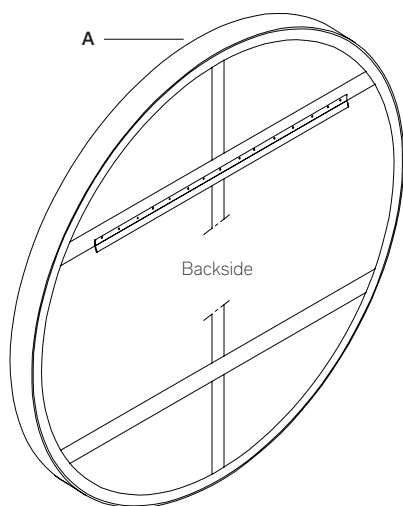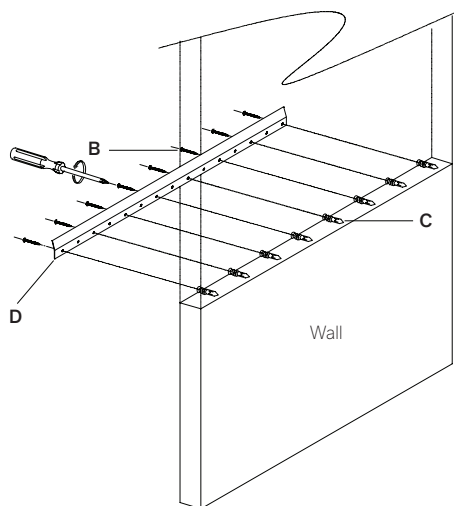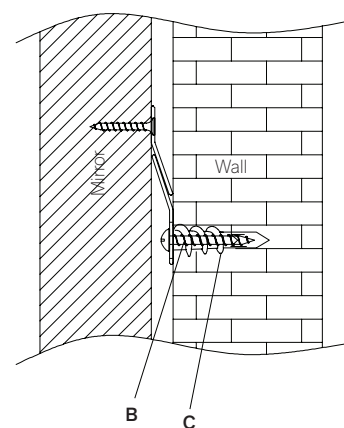FIGURE 1**FIGURE 2****FIGURE 3**

****NOTE: MAKE SURE THAT THE TWO (2) CLEATS (1 ON MIRROR AND 1 ON WALL) ARE LOCKED AND SECURED WITH EACH OTHER. A LEVEL CHECK IS HIGHLY RECOMMENDED. CHECK AND ADJUST IF NEEDED.**

FIGURE 4**FIGURE 5****CLEANING INSTRUCTIONS**

To clean, use a soft dry or damp cloth.

Do not use abrasive cleaners.