


HIGHGATE

HGLS10

Highgate Lavatory Faucet with Porcelain Lever Handles

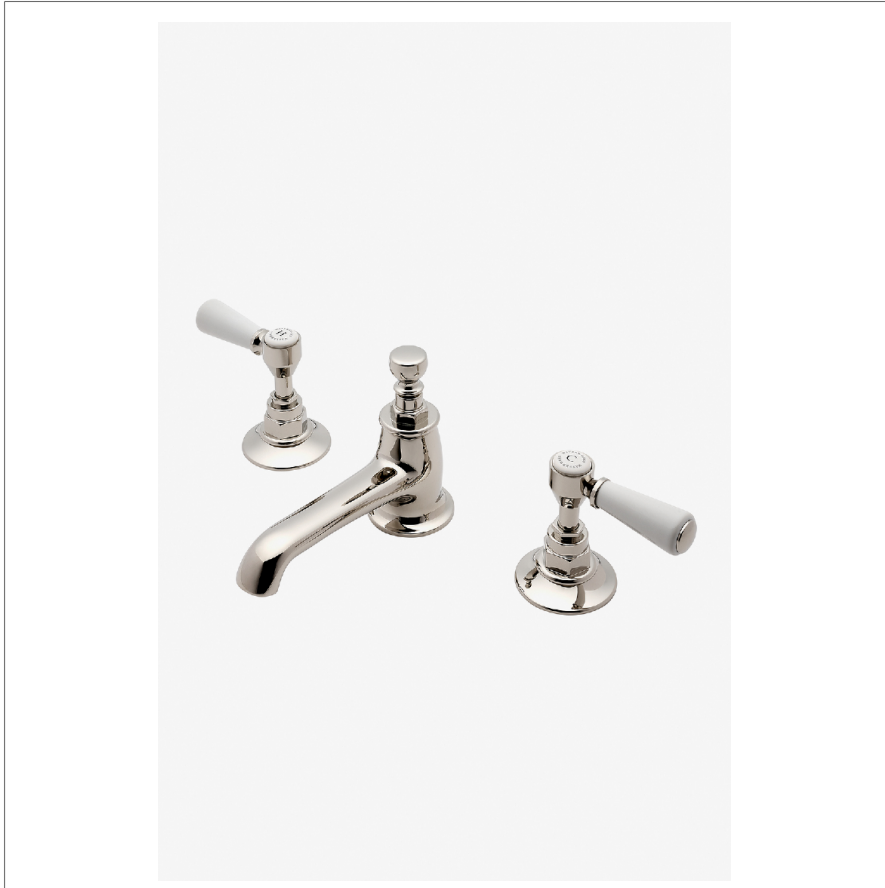

SHOWN IN HIGHGATE LAVATORY FAUCET WITH PORCELAIN LEVER HANDLES | HGLS10

INSPIRATION

Our take on old English style: simple, functional shapes, detailed with white porcelain indices and hexagonal accents for a timeless feel.

PRODUCT FEATURES

Lever Handles

Includes Universal Lift and Turn Drain (UNLD30) which fits 1-1/2" through 1-3/4" drain hole openings

Stocked in Chrome, Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

TECHNICAL DETAILS

ADA Compliance: Yes
Adjustable Versus Fixed Spray: Fixed Spray
Deck Thickness Maximum: 1 7/8"
Deck Thickness Minimum: 3/8"
Depth/Width: 6 11/16"
Drain Depth Maximum: 2"
Drain Depth Minimum: 1 1/4"
Drain Hole Diameter: 1 1/2"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 3/8"
Flow Restriction Options: 1.2
Handle Spread Maximum: 12"
Handle Spread Minimum: 8"
Handle Turn Angle: Quarter Turn
Height: 4 3/8"
Index Color Finish And Material: White Porcelain
Index Marking: H/C
Inlet Connection Size: 1/2"
Inlet Connection Type: Male with Supply Nut
Inlet Supply Spread Maximum: 12"
Inlet Supply Spread Minimum: 8"
Installation Type: Deck Mounted
Integrated Diverter: N
Integrated Spray: N
Number Of Handles: Two
Number Of Holes: Three Hole
Primary Material: Brass
Restricted Maximum Flow Rate: 1.2 gpm
Spout Swivel: N
Spray Included In Unit: N
Suggested Application: Bath
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

HGLS10X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

CERTIFICATIONS




PRODUCT (NOTES)

USA style drain included.

HIGHGATE


HGLS10

Highgate Lavatory Faucet with Porcelain Lever Handles

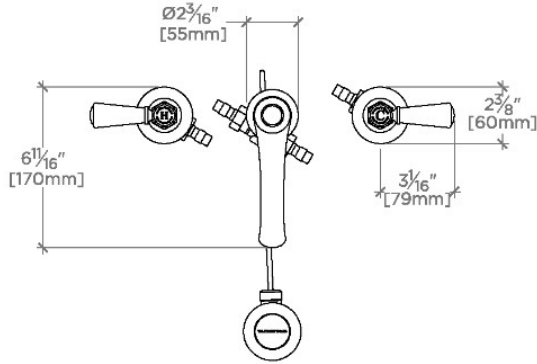


TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

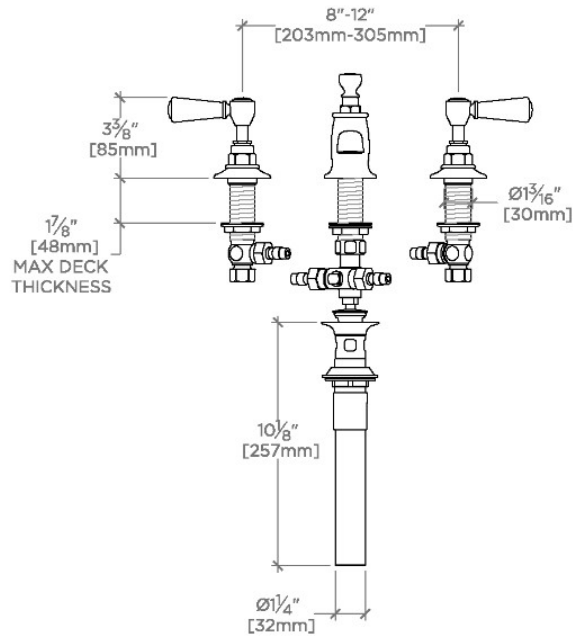

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

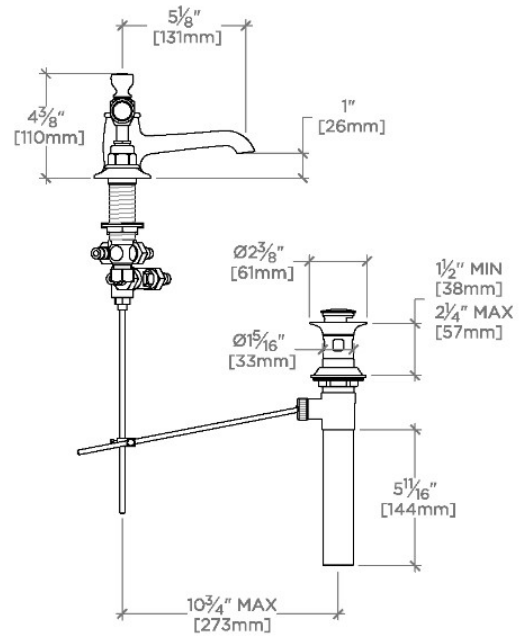

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$